



Technical Support Center

CiMa-Pak Tray Sealers (Small Classic, Classic, Compact Model II)

Replacing the Teflon

Difficulty: Easy


Materials Needed:

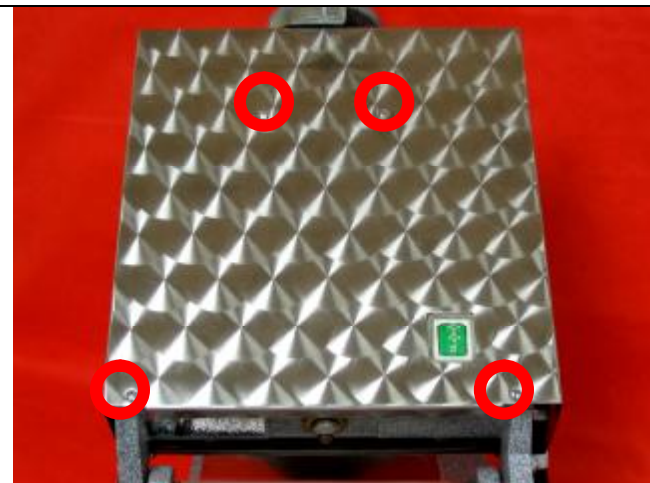
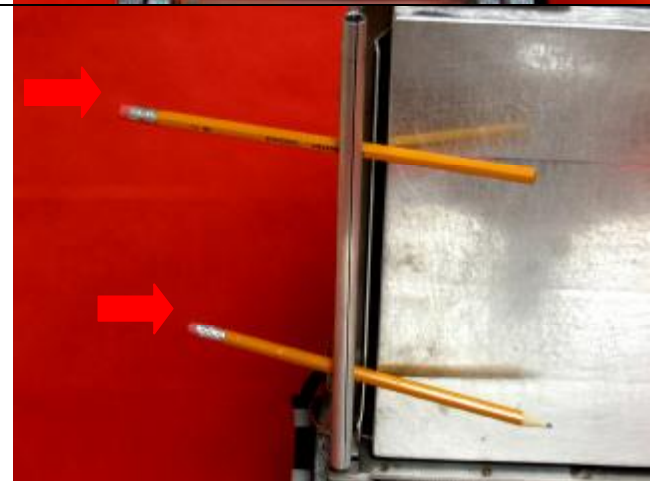
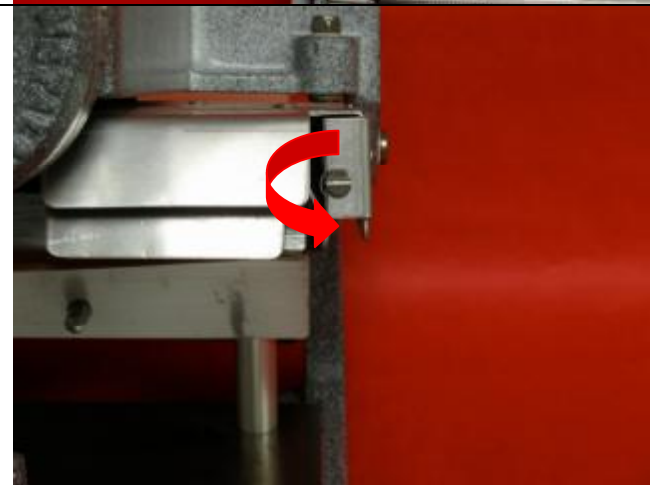
Flat Head Screwdriver


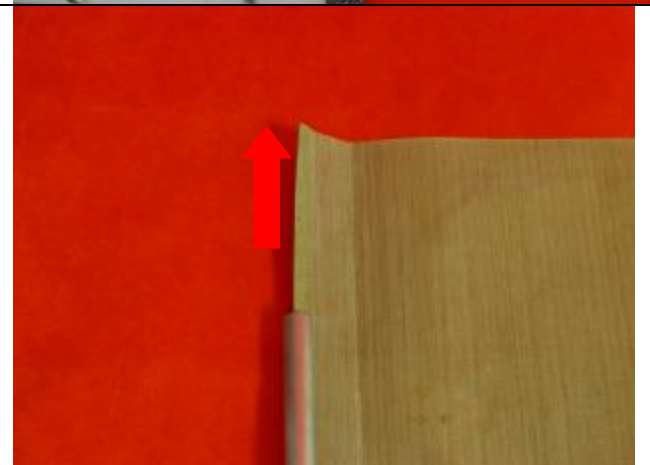
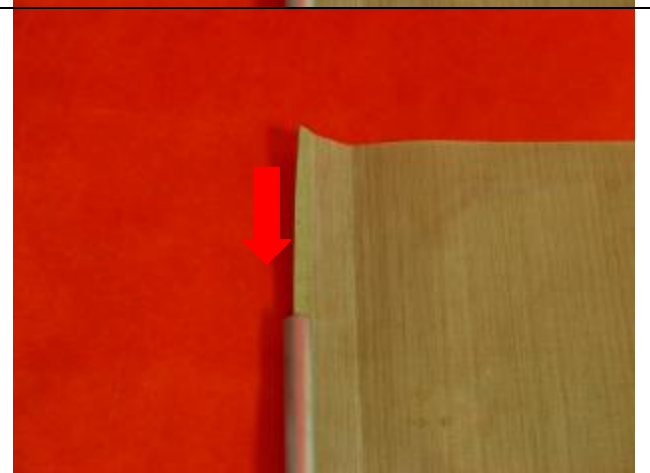
New CiMa-Pak Teflon



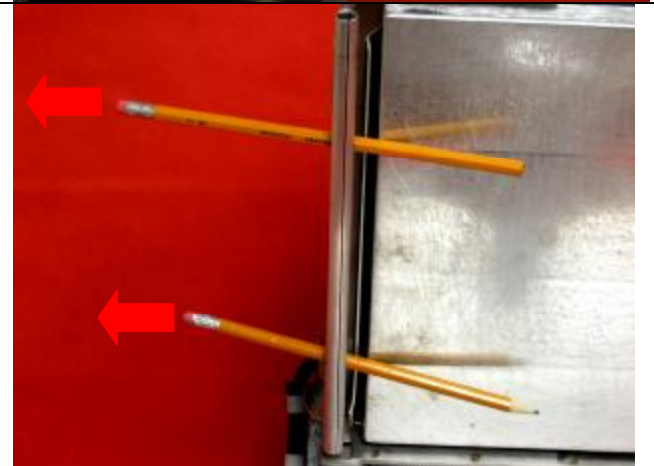
2 Pencils, Pens, or Screw Drivers

Instructions:

Step	Diagram	Instructions
1		Unplug power cord from wall outlet.

2	 A top-down view of a silver, diamond-patterned metal cover. Four screws are circled in red, indicating they need to be removed. The cover is mounted on a dark metal frame.	<p>Undo the four screws on top of the cover, and remove the cover.</p>
3	 A close-up view of a slotted bar on the left side of the machine. Two yellow pencils are being inserted into the slots. Red arrows point to the pencils, indicating the direction of insertion.	<p>Place your pencils/pens behind the slotted bar attached to the springs, located on the left of the machine, as shown in the diagram.</p>
4	 A close-up view of the top of the right slotted bar. A red curved arrow indicates the direction to turn the screw to loosen it.	<p>Undo the screw at the top of the right slotted bar.</p>

5		Lift the right slotted bar off of a screw located on the bottom right of the machine.
6		Slide the old Teflon up, and out of the slotted bars.
7		Slide the New CiMa-Pak Teflon down both of the slotted bars.

8		<p>Replace the right slotted bar over the screw located on the bottom right of the machine.</p>
9		<p>Screw the screw from the top back into the right slotted bar.</p>
10		<p>Remove the two flat metal pieces from behind the left slotted bar to release all slack.</p>

11		Replace the cover and replace the screws.
12		Plug in your CiMa-Pak Tray Sealer, and you are ready to continue production.

*If your machine is still not running properly please contact one of our representatives.